



# MEDICAL CLINIC UNIT

#### MODEL

MEDMOD medical clinic unit is fully furnished and equipped, ready for delivery and assembly, for immediate turnkey operational use.

## **APPLICATIONS**

- **COUNTY JAILS**
- **DETENTION & HOLDING FACILITIES**
- FEDERAL & STATE MODULAR PRISONS
- JUVENILE DETENTION CENTERS
- EMERGENCY RESPONSE

Secure Exam & Treatment Rooms

#### PORTABLE, SECURE HEALTH CARE

Designed to securely address medical needs. Featuring multiple exam rooms, dental and optometry rooms, as well as a radiology laboratory and physical therapy room.



#### **CONSTRUCTION MATERIALS**

All steel construction using

- ASTM Tested & Approved Doors, Frames, Walls & Ceilings
- Detention Grade Locks & Hardware
- **Rated Glazing**

#### SECURITY ELECTRONIC SYSTEMS

- Video Surveillance & Management Systems
- Electronic Lock Controls
- Intercom/Paging Communications
- Video Visitation Console



#### **FLEXIBILITY**

Constructed on skids to assemble on-site for immediate occupancy while adhering to all code compliances, including National Building Code, National Energy Code, ADA & ACA requirements.

## **BUDDY JOHNS** bjohns@modcorr.com


832.829.4262 modcorr.com



## SIZE AND CAPACITY

- Multiple Exam Rooms
- Secure Pharmaceutical Room
- Medical Records Room
- Negative Pressure Room

| Unit                   | Dimensions | Sq. Ft. |
|------------------------|------------|---------|
| Assembled Medical Unit | 56' x 80'  | 4,200   |
| Dental Exam Room       | 11' x 21'  | 231     |
| Medical Lab            | 11' x 10'  | 110     |
| Optometry Room         | 11' x 12'  | 132     |
| Physical Therapy Room  | 21' x 11'  | 231     |
| Radiology Lab          | 27' x 11'  | 297     |
| Triage/Exam Room       | 11' x 17'  | 187     |
| Waiting Room           | 24' x 56'  | 1,344   |

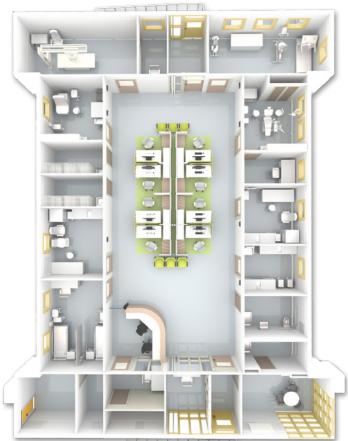



### **DESIGN CONSIDERATION ADOPTED**

- Durability powder coating or epoxy coated finishes throughout
- Furniture, fixtures & finishes all have anti-ligature & contraband resistant designs
- Detention grade LED lighting throughout
- Line of site consideration from control room
- Ample AC/heating & ducted returns to ensure adequate air & ventilation
- Building secure envelope

BUDDY JOHNS bjohns@modcorr.com 832.829.4262 modcorr.com

